

Quick Operation Manual Luna G3 BPAP S/T & Luna G3 BPAP 25A


1. Button Functions

Home Button: Return to the previous menu or main interface

Knob: Adjust device settings

Start / Stop Button: Start / Stop delivering air


2. Setting up the Device

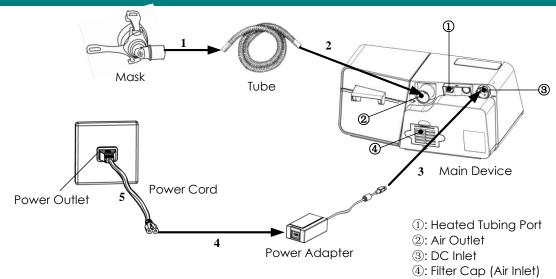

- A. Connect one end of the tube to the assembled mask.
- B. Connect one end of the tube to the air outlet of the device, as shown in the figure above. Or connect the heated tubing joint to the air outlet of the device, and then insert the power plug into the heated tubing port on the back of the device.
- C. Connect the power adapter to the DC inlet of the main device.
- D. Connect the power cord to the power adapter.
- E. Plug the power cord into the power outlet.

3. Adjusting Device Settings

A. Connect the power cord and power adapter properly, The screen displays the Main Interface shown in the figure left below, press **the Start / Stop Button**, and the device will start delivering air, the screen displays the Main Interface shown the figure middle below (applicable to Luna G3 BPAP 25A model) or as shown in the figure right below (applicable to Luna G3 BPAP S/T model).







B. Turn **the Knob** to access the Initial Setup Interface of the Patient Menu, as shown in the figure left below. The **Heated Tubing** option can only be adjusted when the device is connected to the heated tube, as shown in the figure right below. Unconnected 10 min Off 10 min Heated Tubing Ramp Time Ramp Time Humidifier 22 mm Off 22 mm heated Off **Tubing Type** Accessories reminder Delay Off Tubing Type Delay Off Accessories reminder High Off Stby screen saver Stby screen saver Work screen save igoplus to access the Setup Interface, as shown in the figure below. C. Press the Knob 10 min Heated Tubing Ramp Time 22 mm heated Tubing Type Accessories reminder Stby screen saver Work screen saver D. Turn **the Knob** to adjust an option. 10 min Heated Tubing Ramp Time 22 mm heated Off Tubing Type Delay Off Accessories reminder High Off Off Stby screen saver E. Press **the Knob** Θ to confirm your adjustment to the option. 10 min Heated Tubing Ramp Time 22 mm heated Off Delay Off **Tubing Type** Accessories reminder High Off Off Stby screen saver Brightness F. The cursor switches among the options as you turn the Knob Θ , as shown in the figure below. Refer to steps C-E to adjust other options. Press the Home Button 🙆 to exit the Setup Interface. 22 mm Off Delay Off Tubing Type Accessories reminder High Off Off Work screen saver Brightness 2019-12-09 WiFi Date

4. Starting Treatment

After you finish adjusting device settings and return to the Main Interface, press **the Start / Stop Button** to start treatment.